

General Gen-Eye Junior™

What a package!

Looking for a camera system that handles small lines down to 1-1/2", but has the features found on top of the line models? The Gen-Eye Junior delivers the goods. Looking for a system that can run 200 feet in 3" to 6" lines? The Gen-Eye Junior comes through again. Same package, but with a longer, stronger pushrod.

The Gen-Eye Junior is an integral self-contained package with reel, pushrod and monitor all in one portable unit. The big 7" LCD screen is mounted on an extending 4-way adjustable arm, so you can position the screen where it works best for you. When not in use, the screen retracts into the housing behind a protective cover.

The Gen-Eye Junior takes rough handling as part of a day's work. But in addition to being tough, it's loaded with premium features, like an AC/DC power supply with optional rechargeable battery that lasts up to 3 hours; built-in dual frequency transmitter (512 hz and 874 hz) that reduces interference and makes the camera easier to locate.

There's lots more that's included as standard equipment, like a picture inverter, on screen footage counter, built-in text writer, time and date stamp, microphone jack and video and audio jacks for external recording devices.



The 7" LCD monitor is mounted on an extending 4-way adjustable arm, so it can be positioned where it works best for you.

General
PIPE CLEANERS



The toughest tools down the line.™

Gen-Eye Junior Color System

Complete and ready to operate

C-GJ-A Gen-Eye Junior with 100 ft. of Micro-Rod and Color Micro-Camera.

C-GJ-B Same as C-GJ-A, plus Digital Locator with padded bag.

C-GJ-C Gen-Eye Junior with 200 ft. of Mini-Rod, Color Mini-Camera, and 3" trap skid.

C-GJ-D Same as C-GJ-C, plus Digital Locator and padded bag.


To order with 12v Battery Pack, add prefix "B", as in B-C-GJ-B.



Rugged impact resistant housing

AC/DC power supply with optional 12-volt rechargeable battery that lasts up to 3 hours

Reel holds 100 feet of Micro-pushrod for 1-1/2" to 4" lines, or 200 feet of Mini-pushrod for 2" to 6" lines

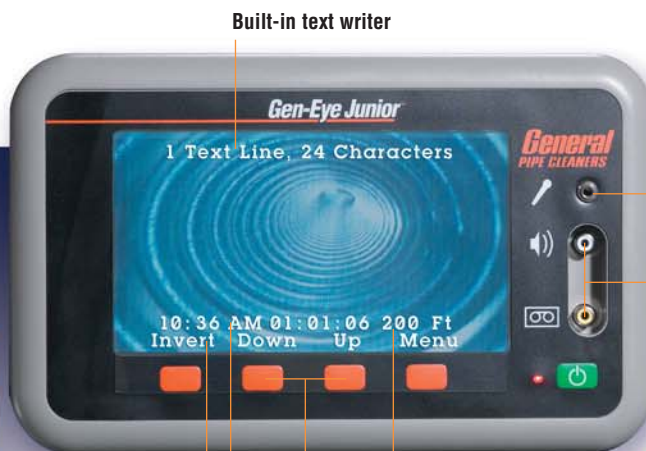

Built-in text writer

Built-in dual frequency transmitter (512 hz and 874 hz) that reduces interference and makes the camera easier to locate

Microphone jack and mute button

Video and Audio output jacks for external recording devices

Picture inverter

Light dimmer control

Built-in on-screen distance counter – in feet or meters

On-screen date and time stamp



Pushrod, reel, and monitor are all contained in this lightweight, all-in-one package that weighs as little as 28 lbs.

Gen-Eye Junior Specifications:

	Color Micro System	Color Mini System	B&W Mini-System
Line Capacity:	1-1/2" to 4" (38mm to 100mm)	2" to 6" (50mm to 150mm)	2" to 6" (5mm to 150mm)
Maximum Distance:	100 ft. (30m)	200 ft. (60m)	200 ft. (60m)
Sensitivity:	.03 Lux	.03 Lux	.03 Lux
Lighting:	16 White LED's 9600 Mcd	16 White LED's 9600 Mcd	16 Red LED's 9600 Mcd
Camera Dimensions:	1" x 7/8" Long (25mm x 22mm)	1.3" x 1.5" Long (33mm x 38mm)	1.3" x 1.5" Long (33mm x 38mm)
Pushrod Diameter:	.28" (7mm)	.37" (9mm)	.37" (9mm)
Unit Dimensions:	18" x 13" x 22" (46cm x 33cm x 55cm)	18" x 13" x 22" (46cm x 33cm x 55cm)	18" x 13" x 22" (46cm x 33cm x 55cm)
Monitor	7" Diagonal Screen	7" Diagonal Screen	7" Diagonal Screen
Video Format:	NTSC or PAL	NTSC or PAL	NTSC or PAL
Power:	110v/60hz AC, 12v DC	110v/60hz AC, 12v DC	110v/60hz AC, 12v DC

General / **General Wire Spring Co.**
PIPE CLEANERS
 1101 Thompson Avenue • McKees Rocks, PA 15136 USA
 800-245-6200 or 412-771-6300 • Fax: 412-771-2771
 Web Site: www.drainbrain.com/geneye